




995MF Series

Locks & latches

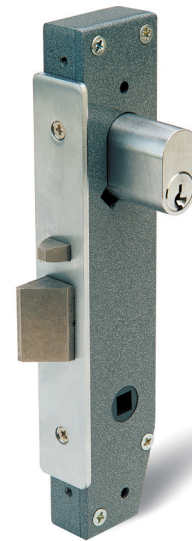

Legge's 995MF Series narrow stile mortice locks and latches have been designed on the underlying successful design principles of the 990MF Series. Manufactured specifically to meet the requirements of the Australasian market, the 995MF Series provides the specifier and end user with a range of vestibule lock, combination lock and latch functions, for both metal and timber doors. The 995MF Series is ideally suited for commercial and industrial applications where durability and security are of major importance.

The 995MF Series has a high purity die cast zinc alloy case to provide rigidity and precision. Major internal components are made of either stainless steel or sintered steel/copper alloy to provide durability and strength.

The final product has been rigorously tested in accelerated wear tests and testimony to the quality of the 995MF Series is shown through the extensive use in the Australian and New Zealand markets.

Features

- Designed to suit hollow stile metal door sections with internal depths from 39mm and narrow stile timber and french doors
- The multi-function case allows easy conversion of a vestibule lock function (inside handle free) to a combination lock function (both handles locked) by a simple external operation
- The reversible stainless steel latch adjusts for inwards/outwards opening and left/right hand without case disassembly
- The latch is deadlatched by a stainless steel sub-bolt that retracts automatically with the main latch
- The 995MF case will accept bolt-through fixing for 159mm vertical fixing door furniture such as the Legge 5300/5400 Series narrow stile furniture
- Follower will accept 7.6mm-8mm furniture spindles, with no adjustment necessary
- A threaded pin is used for secure cylinder retention
- Designed to be compatible with most electric strikes
- The 10 year warranty provides specifiers and users with assured quality and performance


Specification guide

Function	Sub-function	Finish	Backset
Vestibule..... L95V	refer following pages	Chrome plate CP	23mmstandard
Combination..... L95C		Polished brass PB	30mm 30
		Satin chrome plate SCP	38mm 38

1. Function
Select the desired function e.g. Vestibule lock L95V
2. Sub-function
Select the required sub-function e.g. V31 office/classroom locking latch L95V31
3. Finish
Select the desired finish e.g. Satin chrome plate L95V31SCP
4. Backset
Nominate non-standard backset if required e.g. 30mm L95V31SCP30

Legge 995 V Series Vestibule Lock

- Inside handle always operative for emergency escape
- Automatic deadlocking by closing door
- Reversible bolt and function

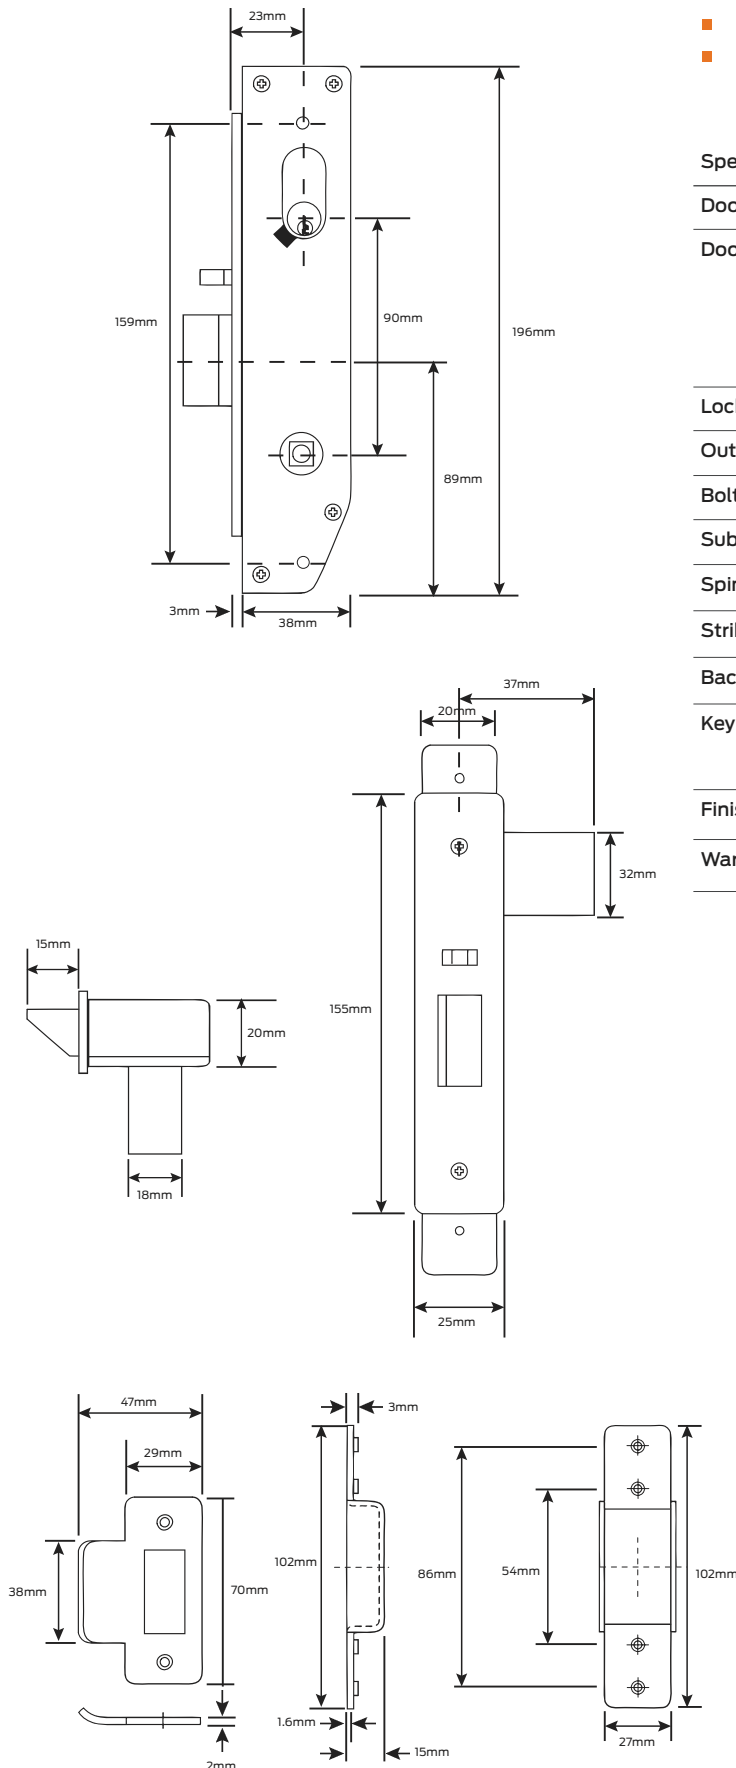

Specifications

Door type	Timber or metal
Door thickness	Timber doors - 32mm to 48mm standard. Extended cylinders, spindles and strike plates available. Metal doors - 35mm to 48mm standard. Designed to be used on hollow stile door sections, with a minimum internal depth of 39mm.
Lock case	High purity zinc alloy
Outer forend	Satin stainless steel or brass
Bolt	Stainless steel
Sub-bolt	Stainless steel
Spindles	2 split spindles 32mm
Strike plate	Satin stainless steel or brass
Backsets	23mm standard. 30mm and 38mm available
Key cylinder	C4 6 pin keyway standard. Schlage C6 pin keyway optional, Schlage E6 pin keyway optional, Schlage Everest D keyway optional
Finishes	Chrome plate, polished brass, satin chrome plate
Warranty	10 year mechanical


Legge 995 V Series Vestibule Lock

Sub-function

Cams and adaptors


V1 (RH) V2 (LH) - Vestibule lock

Outside: Key operates bolt at all times. Handle operative except when locked by inside turn
 Inside: Turn locks and unlocks outside handle. Handle always operative




V7 (RH) V8 (LH) - Exterior & exit lock

Outside: Key operates bolt at all times. Handle operative except when locked by inside key
 Inside: Key locks and unlocks outside handle. Handle always operative




V9 (RH) V10 (LH) - Storeroom lock

Outside: Key operates bolt at all times. Handle always inoperative
 Inside: Handle always operative




V11 (RH) V12 (LH) - Single action lock

Outside: Key operates bolt at all times
 Inside: Handle always operative



V21 (RH) V22 (LH) - Vestibule lock

Outside: Operative except when locked by outside key or inside turn
 Inside: Turn locks and unlocks outside handle. Inside handle always operative




Legge 995 V Series Vestibule Lock

Sub-function

Cams and adaptors


V31 (RH) V32 (LH) - Office/classroom lock

Outside: Key locks and unlocks handle. Handle operative except when locked by outside key
 Inside: Handle always operative




V41 (RH) V42 (LH) - Exterior & exit

Outside: Handle operative except when locked by inside turn
 Inside: Turn locks and unlocks outside handle. Inside handle always operative




V49 (RH) V50 (LH) - Exterior & exit lock

Outside: Handle operative except when locked by inside key
 Inside: Key locks and unlocks outside handle. Inside handle always operative



V55 (RH) V56 (LH) - Exit latch

Outside: Handle always inoperative
 Inside: Handle always operative






Legge 995 C Series Combination Lock


- Key or turn locks or unlocks both handles simultaneously
- Automatic deadlocking by closing door
- Reversible bolt and function

Specifications

Door type	Timber or metal
Door thickness	Timber doors - 32mm to 48mm standard. Extended cylinders, spindles and strike plates available Metal doors - 35mm to 48mm standard. Designed to be used on hollow stile door sections, with a minimum internal depth of 39mm
Lock case	High purity zinc alloy
Outer forend	Satin stainless steel or brass
Bolt	Stainless steel
Sub-bolt	Stainless steel
Spindles	2 split spindles 32mm
Strike plate	Satin stainless steel or brass
Backsets	23mm standard. 30mm and 38mm available
Key cylinder	C4 6 pin keyway standard, Schlage C6 pin keyway optional, Schlage E6 pin keyway optional, Schlage Everest D keyway optional
Finishes	Chrome plate, polished brass, satin chrome plate
Warranty	10 year mechanical

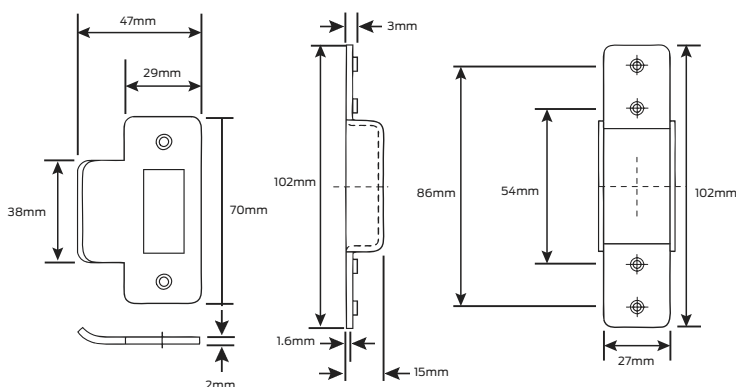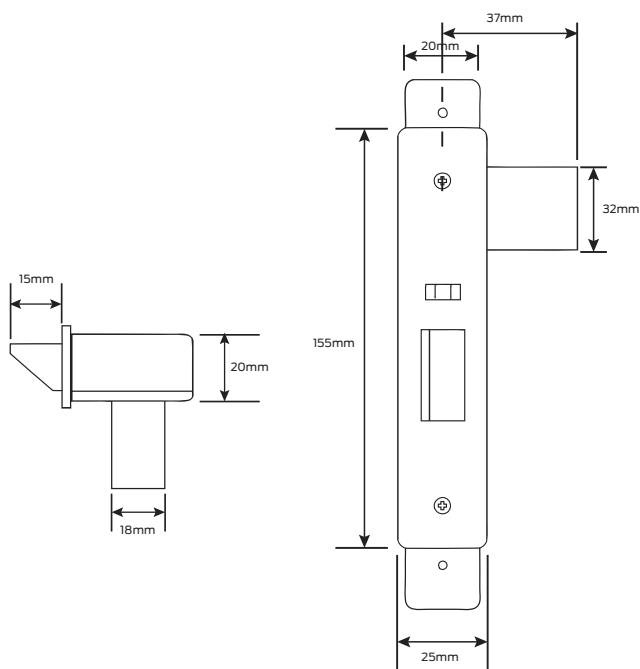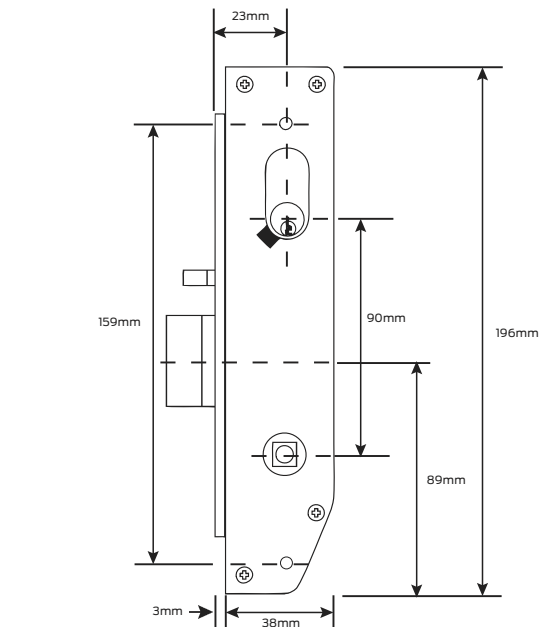

Forend & strike for wooden doors

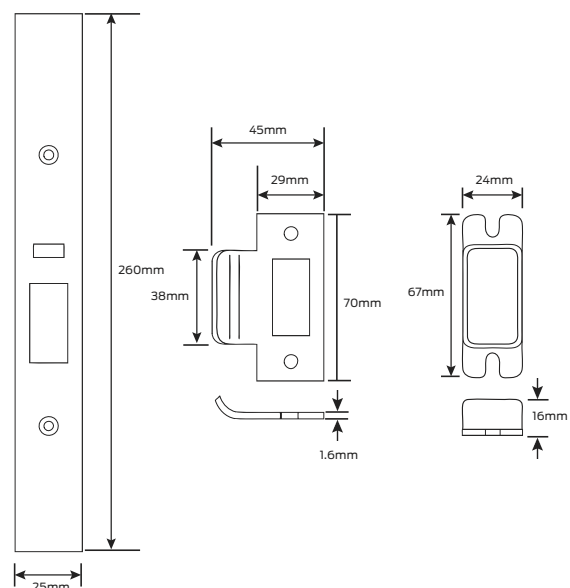


Legge 995 C Series Combination Lock

Sub-function

Cams and adaptors


C1 (RH) C2 (LH) - Entry lock

Outside: Key operates bolt at all times. Both handles operative except when locked by inside turn
 Inside: Turn locks and unlocks both handles




C7 (RH) C8 (LH) - Glass door lock

Outside: Key operates bolt at all times. Both handles operative except when locked by inside key
 Inside: Key locks and unlocks both handles




C21 (RH) C22 (LH) - Entry lock

Outside: Both handles operative except when locked by outside key or inside turn
 Inside: Turn locks and unlocks both handles




C23 (RH) C24 (LH) - Turn entry lock

Outside: Both handles operative except when locked by outside key
 Inside: Turn operates bolt at all times



C27 (RH) C28 (LH) - Glass door lock

Outside: Handle operative except when locked by outside or inside key
 Inside: Handle operative except when locked by inside or outside key




Legge 995 C Series Combination Lock

Sub-function

Cams and adaptors


C31 (RH) C32 (LH) - Glass door lock

Outside: Both handles operative except when locked by outside key
 Inside: Handle operative except when locked by outside key




C33 (RH) C34 (LH) - Privacy latch

Outside: Operative except when locked by inside turn. Emergency button unlocks both handles
 Inside: Turn locks and unlocks both handles




C41 (RH) C42 (LH) - Exterior privacy latch

Outside: Both handles operative except when locked by inside turn
 Inside: Turn locks and unlocks both handles




C49 (RH) C50 (LH) - Exterior lock

Outside: Both handles operative except when locked by inside key
 Inside: Key locks and unlocks both handles



C57 (RH) C58 (LH) - Passage latch

Outside: Always operative
 Inside: Always operative



Legge 995MF Cams and Cam Adaptors

1



2



5




6A (with adaptor)



Legge 995MF accessories


Long lipped strike

Strikes for non-standard wooden jambs. Available in 50mm, 60mm, 70mm, 80mm & 90mm (A)
Finishes: Chrome plate, polished brass, satin chrome plate



Short lipped strike

Strikes for non-standard jambs
Finishes: Chrome plate, polished brass, satin chrome plate.





ALLEGION™

PIONEERING SAFETY™

We are
Allegion